


Spherical roller thrust bearings



Dalian Goldbull Bearing Co.,Ltd


www.gb-bearing.com

Spherical roller thrust bearings

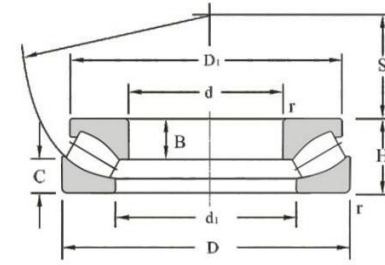


Bearing Designations		Principal Dimensions (mm)				Basic load ratings (KN)		Speed ratings (rpm)		Weight (kg)
Old spec	Designations	d	D	H	r min	Dynamic (Ca)	Static (Coa)	Grease	Oil	
9039412	29412	60	130	42	1.5	247	619	2000	2400	2.55
9039413	29413	65	140	45	2	303	770	1800	2200	3.2
9039414	29414	70	150	48	2	337	868	1800	2200	3.9
9069414		70	150	48	2	315	806	1800	2200	3.87
9039415	29415	75	160	51	2	386	1001	1700	2000	5.23
9069415		75	160	51	2	358	786	1700	2000	4.27
9039416	29416	80	170	54	2.1	431	1120	1600	1900	5.72
9069416		80	170	54	2.1	370	718	1600	1900	5.33
9039317	29317	85	150	39	1.5	242	726	1700	2100	2.9
9069317		85	150	39	1.5	183	559	1700	2100	2.8
9039417	29417	85	180	58	2.1	472	1232	1500	1800	6.55
9039318	29318	90	155	39	1.5	262	756	1600	2000	2.83
9039418	29418	90	190	60	2.1	521	1365	1400	1700	7.56
9069418		90	190	60	2.1	442	706	1400	1700	7.13
9039320	29320	100	170	42	1.5	307	896	1600	1900	4.23
9039420	29420	100	210	67	3	760	1680	1200	1500	12.3

Spherical roller thrust bearings

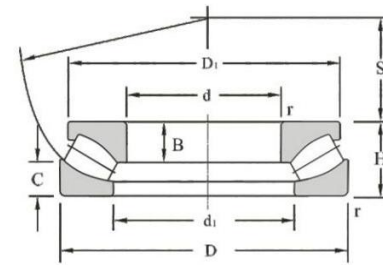


Bearing Designations		Principal Dimensions (mm)				Basic load ratings (KN)		Speed ratings (rpm)		Weight (kg)
Old spec	Designations	d	D	H	r min	Dynamic (Ca)	Static (Coa)	Grease	Oil	
9069420		100	210	67	3	567	865	1200	1500	10.05
9039322	29322	110	190	48	2	397	1197	1400	1700	6
9039422	29422	110	230	73	3	832	2051	1200	1400	13.3
9039324	29324	120	210	54	2.1	484	1470	1200	1500	7.3
9069324		120	210	54	2.1	435	1320	1200	1500	6.88
9039424	29424	120	250	78	4	1158	2380	1100	1300	17.72
9069424		120	250	78	4	783	2140	1100	1300	15.96
9039326	29326	130	225	58	2.1	592	1960	1200	1400	9.4
9069326		130	225	58	2.1	532	1671	1200	1400	8.64
9039426	29426	130	270	85	4	1115	2880	900	1100	23.89
9069426		130	270	85	4	898	2457	900	1100	23
9039328	29328	140	240	60	2.1	756	2529	1100	1300	11.33
9039428	29428	140	280	85	4	1233	3780	900	1100	22.2
9069428		140	280	85	4	986	3024	900	1100	21.9
9039320	29230	150	215	39	1.5	347	1072	1200	1500	4.36
9039330	29330	150	250	60	2.1	697	2753	1100	1300	11.8
9069330		150	250	60	2.1	595	1827	1100	1300	10.9
9039430	29430	150	300	90	4	1264	3920	800	1000	27.5

Spherical roller thrust bearings

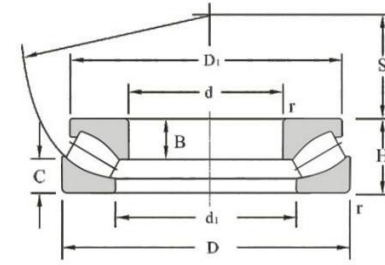


Bearing Designations		Principal Dimensions (mm)				Basic load ratings (KN)		Speed ratings (rpm)		Weight (kg)
Old spec	Designations	d	D	H	r min	Dynamic (Ca)	Static (Coa)	Grease	Oil	
9069430		150	300	90	4	1011	3136	800	1000	26.4
9039232	29232	160	225	39	1.5	359	1168	1200	1500	4.52
9039332	29332	160	270	67	3	757	2820	1000	1200	14.32
9069332		160	270	67	3	681	2560	1000	1200	12.62
9039432	29432	160	320	95	5	1392	4320	800	1000	32.7
9069432		160	320	95	5	1114	3670	800	1000	31.8
9039234	29234	170	240	42	1.5	379	1226	1200	1500	4.86
9039334	29334	170	280	67	3	787	2975	900	1100	15.4
9039434	29434	170	340	103	5	1697	4060	750	900	44.98
9069434		170	340	103	5	1134	3712	750	900	43.5
9039236	29236	180	250	42	1.5	394	1533	1100	1400	7.24
9039336	29336	180	300	73	3	923	3150	850	1000	19.9
9069336		180	300	73	3	821	2792	850	1000	19.5
9039436	29436	180	360	109	5	1683	4550	650	800	55
9069436		180	360	109	5	1309	4095	650	800	52.2
9039238	29238	190	270	48	2	405	1848	1100	1400	6.36
9039338	29338	190	320	78	4	1096	3760	850	1000	26.31
9069338		190	320	78	4	921	3403	850	1000	25.2
9039438	29438	190	380	115	5	1890	5587	650	800	61.7

Spherical roller thrust bearings

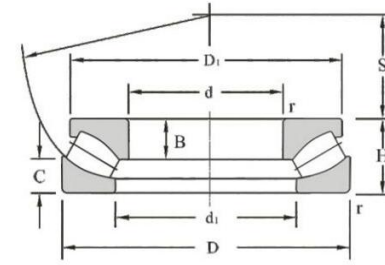


Bearing Designations		Principal Dimensions (mm)				Basic load ratings (KN)		Speed ratings (rpm)		Weight (kg)
Old spec	Designations	d	D	H	r min	Dynamic (Ca)	Static (Coa)	Grease	Oil	
9069438		190	380	115	5	1418	4190	650	800	60.2
9039240	29240	200	280	48	2	517	2070	1100	1400	9.29
9039340	29340	200	340	85	4	1177	4097	750	900	32.5
9069340		200	340	85	4	1008	3773	750	900	27.89
9039440	29440	200	400	122	5	1832	6520	600	750	71.5
9069440		200	400	122	5	1557	5524	600	750	64.52
9039244	29244	220	300	48	2	566	2705	1100	1300	9.75
9069244		220	300	48	2	509	2434	1100	1300	8.9
9039344	29344	220	360	85	4	1213	4160	750	900	33.7
9069344		220	360	85	4	1031	3784	750	900	32.8
9039444	29444	220	420	122	6	2311	6920	600	750	75.9
9039248	29248	240	340	60	2.1	720	2760	900	1100	16.99
9039348	29348	240	380	85	4	1224	4320	750	900	35.37
9069348		240	380	85	4	1041	3888	750	900	31.94
9039448	29448	240	440	122	6	2178	7280	600	750	78.9
9069448			440	122	6	1742	5820	600	750	72.8
9039252	29252	260	360	60	2.1	769	3460	900	1100	18.7
9069252		260	360	60	2.1	692	3110	900	1100	15.7
9039352	29352	260	420	95	5	1732	6120	600	750	51.14

Spherical roller thrust bearings

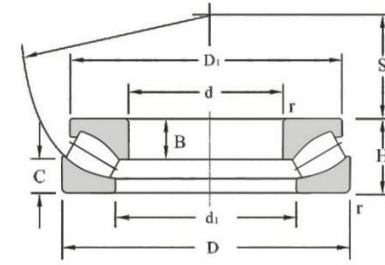


Bearing Designations		Principal Dimensions (mm)				Basic load ratings (KN)		Speed ratings (rpm)		Weight (kg)
Old spec	Designations	d	D	H	r min	Dynamic (Ca)	Static (Coa)	Grease	Oil	
9069352		260	420	95	5	1559	5508	600	750	49.22
9039452	29452	260	480	132	6	2610	9630	550	650	106.25
9039256	29256	280	380	60	2.1	796	3690	850	1000	19.5
9069256		280	380	60	2.1	728	3291	850	1000	18.32
9039356	29356	280	440	95	5	1650	6885	600	750	53.82
9069356		280	440	95	5	1502	6265	600	750	50.91
9039456	29456	280	520	145	6	3060	10480	500	600	132.21
9039260	29260	300	420	73	3	1044	4120	750	900	31.2
9039360	29360	300	480	109	5	1862	7280	600	700	75.22
9069360		300	480	109	5	1677	6698	600	700	72.3
9039460	29460	300	540	145	6	3478	14689	450	550	143.2
9039264	29264	320	440	73	3	1071	4360	750	900	32.84
9039364	29364	320	500	109	5	2007	7520	550	650	78.25
9069364		320	500	109	5	1786	6692	550	650	74.62
9039464	29464	320	580	155	7.5	3285	11680	450	550	179.25
9039268	29268	340	460	73	3	1107	4698	700	850	34.2
9069268		340	460	73	3	998	4322	700	850	32.42
9039368	29368	340	540	122	5	2376	8960	500	630	104.49
9069368		340	540	122	5	2091	7885	500	630	99.2

Spherical roller thrust bearings

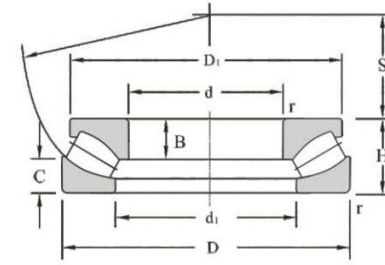


Bearing Designations		Principal Dimensions (mm)				Basic load ratings (KN)		Speed ratings (rpm)		Weight (kg)
Old spec	Designations	d	D	H	r min	Dynamic (Ca)	Static (Coa)	Grease	Oil	
9039468	29468	340	620	170	7.5	3960	13920	430	530	217.9
9039272	29272	360	500	85	4	1444	7571	600	700	49.5
9069272		360	500	85	4	1271	6890	600	700	46.2
9039372	29372	360	560	122	5	2403	9200	500	600	109
9069372		360	560	122	5	2115	8372	500	600	102
9039472	29472	360	640	170	7.5	4255	18506	400	500	233.5
9069472		360	640	170	7.5	3445	11696	400	500	241.62
9039276	29276	380	520	85	4	1516	8196	600	700	52.6
9069276		380	520	85	4	1334	7540	600	700	49.7
9039376	29376	380	600	132	6	2861	13505	500	600	136.6
9069376		380	600	132	6	2518	12424	500	600	131.8
9039476	29476	380	670	175	7.5	5350	20900		480	252
9039280	29280	400	540	85	4	1531	8423	600	700	54.6
9069280		400	540	85	4	1348	7749	600	700	52.3
9039380	29380	400	620	132	6	2965	14278	430	500	143.9
9069380		400	620	132	6	2610	13136	430	500	138.6
9039480	29480	400	710	185	7.5	6370	24700		450	309
9039284	29284	420	580	95	5	1893	10414	550	650	74.2
9069284		420	580	95	5	1666	9580	550	650	70.7

Spherical roller thrust bearings

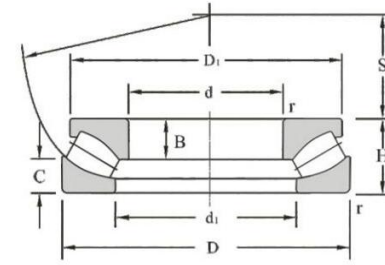


Bearing Designations		Principal Dimensions (mm)				Basic load ratings (KN)		Speed ratings (rpm)		Weight (kg)
Old spec	Designations	d	D	H	r min	Dynamic (Ca)	Static (Coa)	Grease	Oil	
9039384	29384	420	650	140	6	3306	15923	430	500	156.9
9069384		420	650	140	6	2909	14649	430	500	151.4
9039484	29484	420	730	185	7.5	6580	26000		430	325
9039288	29288	440	600	95	5	1981	11195	550	650	78
9069288		440	600	95	5	1744	10188	550	650	73.9
9039388	29388	440	680	145	6	3563	17300	400	500	188.9
9069388		440	680	145	6	3136	15229	400	500	182.5
9039488	29488	440	780	206	9.5	7330	27300		380	410
9039292	29292	460	620	95	5	1988	11379	550	650	80.5
9069292		460	620	95	5	1749	10354	550	650	76.2
9039392	29392	460	710	150	6	3827	18945	350	400	212.4
9069392		460	710	150	6	3367	16672	350	400	207.6
9039492	29492	460	800	206	9.5	7640	28150		380	425
9039296	29296	480	650	103	5	2164	12199	500	600	95
9069296		480	650	103	5	1904	11102	500	600	91.4
9039396	29396	480	730	150	6	3991	20212	350	400	221.5
9069396		480	730	150	6	3512	17786	350	400	215.9
9039496	29496	480	850	224	9.5	9230	30800		340	550
90392/500	292/500	500	670	103	5	2236	12850	430	500	99.3

Spherical roller thrust bearings

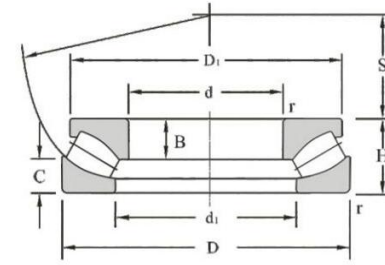

Bearing Designations		Principal Dimensions (mm)				Basic load ratings (KN)		Speed ratings (rpm)		Weight (kg)
Old spec	Designations	d	D	H	r min	Dynamic (Ca)	Static (Coa)	Grease	Oil	
90692/500		500	670	103	5	1967	11310	430	500	95.5
90393/500	293/500	500	750	150	6	4019	20600	350	400	239
90693/500		500	750	150	6	3537	18133	350	400	196.44
90394/500	294/500	500	870	224	9.5	9320	32248	250	320	544.7
90392/530	292/530	530	710	109	5	2532	14425	430	500	118.5
90393/530	293/530	530	800	160	7.5	5230	23600		400	270
90394/530	294/530	530	920	236	9.5	10500	40000		320	620
90392/560	292/560	560	750	115	5	2694	15786	430	500	138.1
90394/560	294/560	560	980	250	12	12000	51000		300	810
90392/600	292/600	600	800	122	5	2998	18062	350	400	165.2
90394/600	294/600	600	1030	258	12	13100	55000		280	900
90392/630	292/630	630	850	132	6	3577	21601	350	400	211.9
90692/630		630	850	132	6	3250	8350		300	231
90393/630	293/630	630	950	190	9.5	8450	38000		320	485
90394/630	294/630	630	1090	280	12	14400	60000		260	1100
90392/670	292/670	670	900	140	6	3933	23677	250	320	246.8
90394/670	294/670	670	1150	290	15	15400	65000		240	1260

Spherical roller thrust bearings

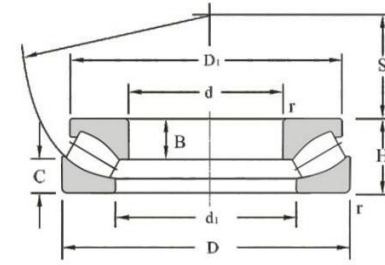


Bearing Designations		Principal Dimensions (mm)				Basic load ratings (KN)		Speed ratings (rpm)		Weight (kg)
Old spec	Designations	d	D	H	r min	Dynamic (Ca)	Static (Coa)	Grease	Oil	
90692/710		710	950	145	6	3600	12000		240	279
90393/710	293/710	710	1060	212	9.5	9950	45000		280	660
90394/710	294/710	710	1220	308	15	17600	76000		220	1450
90392/750	292/750	750	1000	150	6	6100	30000		340	325
90393/750	293/750	750	1120	224	9.5	9370	45500		260	770
90394/750	294/750	750	1280	315	15	18700	80000		200	1533
90694/750		750	1280	315	15	13500	31000		100	1340
90392/800	292/800	800	1060	155	7.5	5650	36000	240	340	343
90393/800	293/800	800	1180	230	9.5	9950	49000		240	865
90394/800	294/800	800	1360	335	15	20000	93000		190	2020
90392/850	292/850	850	1120	160	7.5	6730	35000		300	425
90394/850	294/850	850	1440	354	15	28600	100000	120	150	2090
90392/900	292/900	900	1180	170	7.5	7550	41500	120	150	445
90394/900	294/900	900	1520	372	15	26400	121000	120	150	2653
90392/950	292/950	950	1250	180	7.5	8280	45000		260	600
90394/950	294/950	950	1600	390	15	27100	127000	170	220	2920
90393/1000	293/1000	1000	1460	276	12	17300	86000		180	1550

Spherical roller thrust bearings



Dalian Goldbull Bearing Co.,Ltd

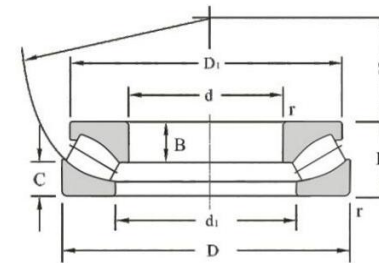

Bearing Designations		Principal Dimensions (mm)				Basic load ratings (KN)		Speed ratings (rpm)		Weight (kg)
Old spec	Designations	d	D	H	r min	Dynamic (Ca)	Static (Coa)	Grease	Oil	
90392/1060	292/1060	1060	1400	206	9.5	9600	62000	180	260	767
90394/1020	294/1020	1020	1770	426	15	32100	150000	150	200	4040
90392/1120	292/1120	1120	1460	206	9.5	11300	62000	170	220	900
90392/1180	292/1180	1180	1520	206	9.5	10900	64000	170	220	854
217/1320		1320	1540	175	6	6500	48500	120	150	514